
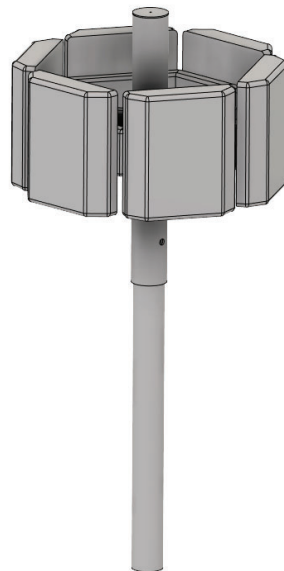


PRODUCT SPECIFICATIONS

ECHOLINK **LTE**

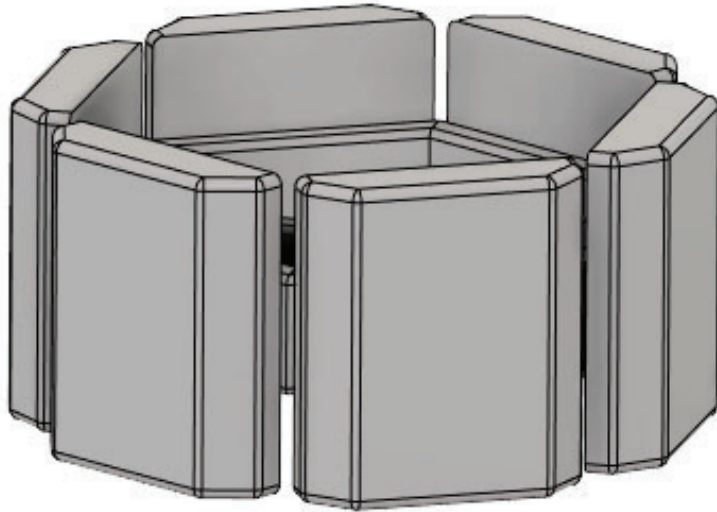

Specifications

ECHOLINK LTE - Auto-Aligning Extended Range LTE Access Point

FREQUENCY	698MHz - 2650 MHz
PEAK ANTENNA GAIN	10dBi (6 Antenna Option) / 14dBi (12 Antenna Option)
POLARIZATION	Vertical + Horizontal
F/B	28dB
AZIMUTH COVERAGE	360° Cylindrical
AZIMUTH BEAM POSITIONS	6
AZIMUTH BEAMWIDTH	70°
ELEVATION BEAMWIDTH	50°
ANTENNA	VSWR: <2.5 (698-960 MHz) / <1.5 (1690-2700 MHz)

Physical Specifications

DIMENSIONS	18" (Ø) x 8.07" (H) / 45.72cm (Ø) x 20.50cm (H)
WEIGHT	20lbs. / 9.07 kg (est.)
ENVIRONMENTAL	IP66 / Operating:-40 to 60°C / Storage:-40 to 70°C
POWER	24 or 48VDC PoE / 7.5W Nominal